


# 12' PREDATOR

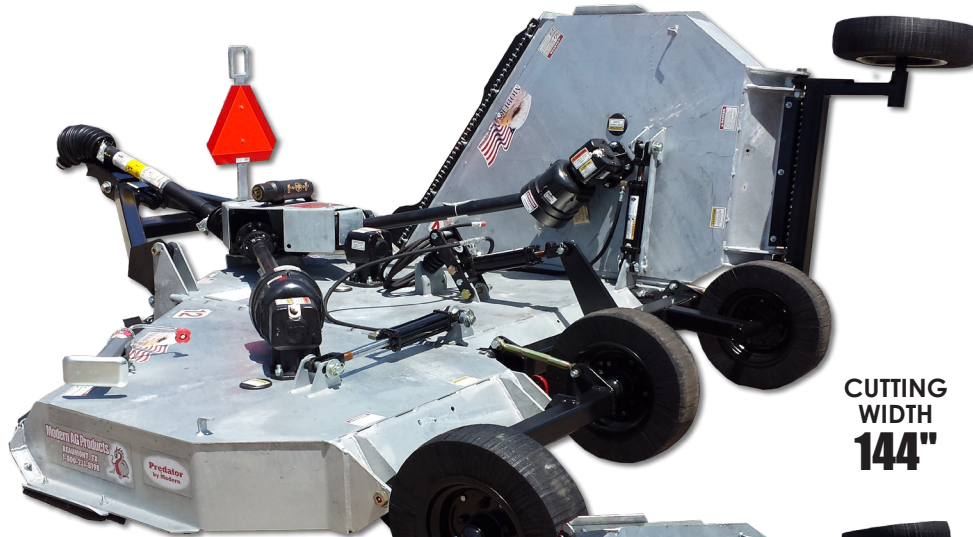

**FRONT AND REAR CHAINS ARE STANDARD ON ALL 12' PREDATORS.**

**Features:**

- 160 hp transfer gear box with 70 hp center and wing gearboxes
- Best in class cut capacity
- Smooth top deck
- Requires only one hydraulic outlet
- Replaceable skid shoes
- Faster blade tip speed

**CUTTING WIDTH  
144"**

\* Gearbox ratings based on field performance.


\*\* The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.



**HOT-DIPPED GALVANIZED DECK & FRAME**



**FRONT & REAR CHAIN GUARD STANDARD**

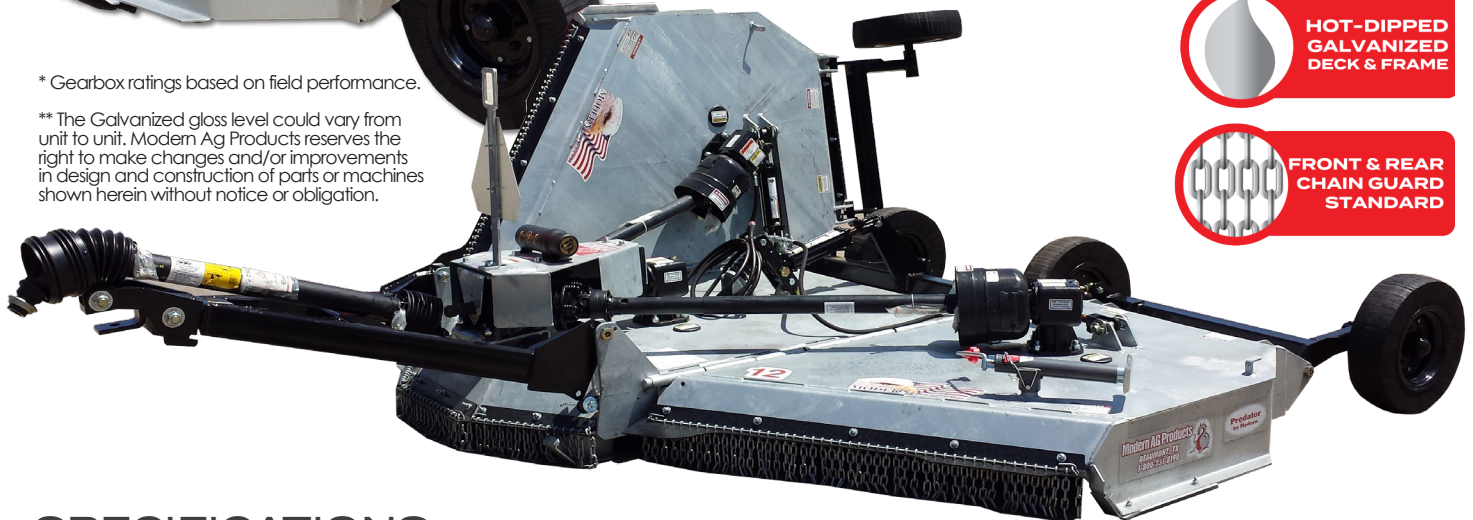

## SPECIFICATIONS

|                           |               |                           |                |                          |               |
|---------------------------|---------------|---------------------------|----------------|--------------------------|---------------|
| Cutting Width. . . . .    | 144"          | Horsepower                |                | Driveline Size:          |               |
| Transport Width. . . . .  | 90"           | Required (min). . . . .   | 40 hp...(max)  | Main. . . . .            | Cat. 4        |
| Overall Width. . . . .    | 151"          | (min) . . . . .           | 70 hp...(max)  |                          | Constant      |
| Overall Length. . . . .   | 159"          | Main Gearbox              |                |                          | Veloc.        |
| Cutting Height . . . . .  | 2"-12"        | or Divider Box*. . . . .  | 160 hp         | Outboard Center          |               |
| Blade Overlap . . . . .   | 6"            | Outboard Gearbox          |                | or Wings . . . . .       | Cat. 3 w/Slip |
| Wing Lift Hydraulics. . . | Standard      | or Center & Wings* . . .  | 70 hp          |                          | Clutch        |
| Wing Flex. . . . .        | 90° Up/22°    | Output Shaft Diameter. 2" |                | Deck Thickness. . . . .  | 3/16"         |
| Down                      |               | Cut Capacity . . . . .    | 2-1/2"         | Side Skirt. . . . .      | 1/4" x 11"    |
| Jackstand . . . . .       | Standard      | Blade Tip Speed:          |                | Replaceable Skid         |               |
| Hitch . . . . .           | Swivel Clevis | Main or Center            | 540 16,362 FPM | Shoes . . . . .          | Standard      |
| Blade Carrier. . . . .    | Pan Stump     | Wings                     | 540 15,708 FPM | Front Safety Chains. . . | Standard      |
|                           | Jumpers       |                           |                | Rear Safety Chains . . . | Standard      |
|                           |               |                           |                | Weight (Approx). . . . . | 3,020 lbs.    |
|                           |               |                           |                | Standard Tires. . . . .  | Laminated     |
|                           |               |                           |                |                          | 600 x 9       |