



20' PREDATOR



This unit is equipped with a 16,000 lb leveling ratchet jack.

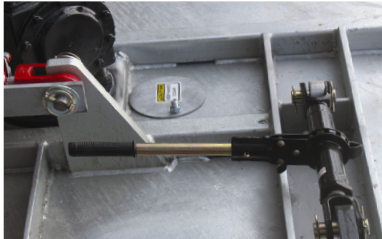

Smooth underdecks make for more efficient mowing and less area for rust to begin. Deck rings are standard.

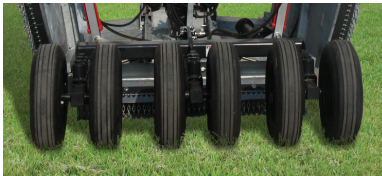

Triple Center Axles are standard on the 20' Predator. Shown here with optional used aircraft tires.

DUAL WING WHEELS ARE STANDARD EQUIPMENT ON THE 20' PREDATOR.



**CUTTING WIDTH
238"**



* Gearbox ratings based on field performance.

** The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.

SPECIFICATIONS

Cutting Width.	238"	Main Gearbox or Divider Box*	255 hp	Outboard Center or Wings.	Cat. 4 w/Slip Clutch
Transport Width.	105"	Outboard Gearbox or Center & Wings*	210 hp	Deck Thickness	3/16"
Overall Width.	246"	Output Shaft Diameter.	2"	Side Skirt	1/4" x 10 1/4"
Overall Length.	204"	Cut Capacity	3"	Replaceable Skid	
Cutting Height	2"-15"	Blade Tip Speed:		Shoes	Standard
Blade Overlap	5"	Main or Center	540 15,992 FPM	Front Safety Chains.	Standard
Wing Lift Hydraulics.	Standard	1000	16,052 FPM	Rear Safety Deflectors: Rubber Guard	
Wing Flex.	90° Up/22° Down	Wings	540 15,384 FPM	Standard with Rear Chain Option	
Jackstand	Standard	1000	15,484 FPM	Weight (Approx).	6750 lbs
Hitch	Swivel Clevis	Driveline Size:		Standard Tires	Laminated 600 x 9
Blade Carrier	Pan Stump Jumpers	Main.	Cat. 5 Constant Veloc.	Dual Wingwheels.	Standard
Horsepower Required (min)	80 hp			Deck Rings to Protect Deck	Standard