

# 8' PREDATOR



Quick Attach Lift Type shown Cat. 4 w/clutch

**Features:**

- 1/2" gearbox plate
- Available in pull type & quick attach lift
- Cylinder and hoses are standard on pull type
- Heavy duty stump jumpers & slip clutch protected
- Laminated tailwheels
- Solid 3/16" (7 Gauge) Deck
- Quick Hitch Compatible
- 3/4" A-Frames - QA
- Cat 2. Hitch Lift Type




**HOT-DIPPED GALVANIZED DECK & FRAME**



**FRONT CHAIN GUARD OPTIONAL  
REAR CHAIN GUARD STANDARD**

**ITEM NUMBERS**  
001-1008D-PULL  
001-1008-3PT

**THE 8' PREDATOR IS A CAT. 2 HITCH WITH A 150 HP TRANSFER GEARBOX W/ TWO 95 HP OUT BOARD GEARBOXES.**

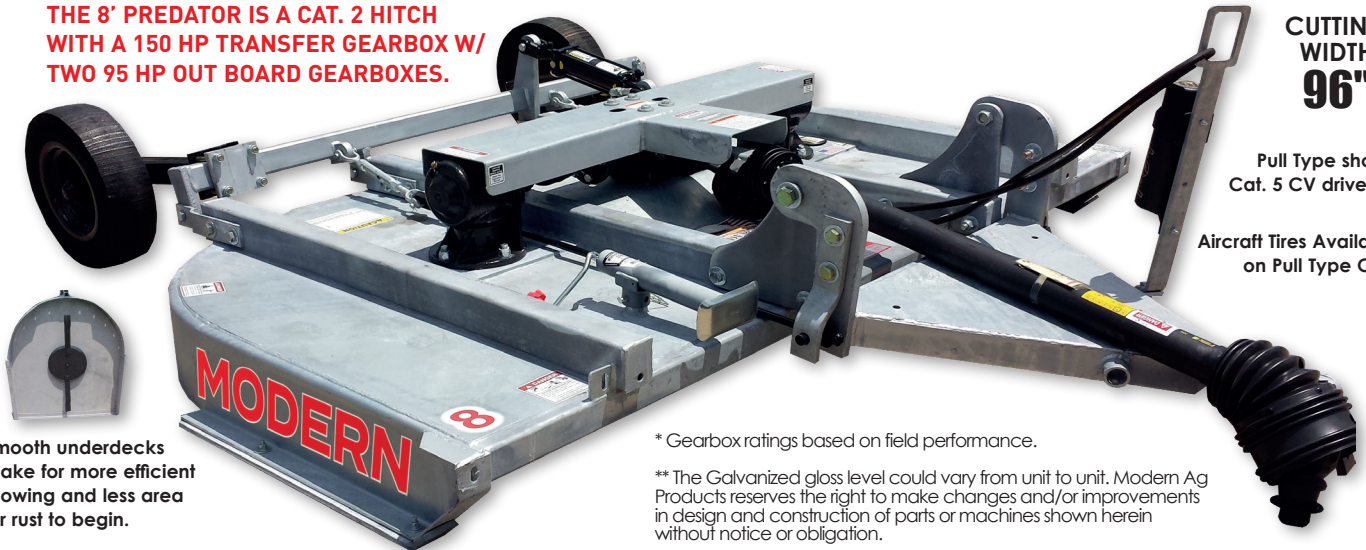

**CUTTING WIDTH**  
**96"**

Pull Type shown  
Cat. 5 CV driveline

Aircraft Tires Available on Pull Type Only

Smooth underdecks make for more efficient mowing and less area for rust to begin.

\* Gearbox ratings based on field performance.

\*\* The Galvanized gloss level could vary from unit to unit. Modern Ag Products reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.

## SPECIFICATIONS

|   |   |  |
|---|---|--|
| Cutting Width. . . . . 96"                | Main Gearbox or Divider Box* . . . . . 150 hp       | Deck Thickness . . . . . 3/16"                         |
| Transport Width. . . . . 102"             | Outboard Gearbox or Center & Wings* . . . . . 95 hp | Side Skirt . . . . . 1/4" x 8"                         |
| Overall Width. . . . . 102"               | Output Shaft Diameter. 2-3/8"                       | Front Safety Deflectors Chain Option                   |
| Overall Length. . . . . 97"               | Cut Capacity . . . . . 3"                           | Rear Safety Deflectors: Chain Guard Standard           |
| Overall Height . . . . . 3" - 15"         | Blade Tip Speed:                                    | Weight (Approx): . . . . . QA 1975 lbs. Pull 2370 lbs. |
| Blade Overlap . . . . . 3"                | 540. . . . . 15,847 FPM                             | Standard Tires. . . . . Laminated 600 x 9              |
| Jackstand . . . . . Standard              | 1000 . . . . . 15,847 FPM                           | Dual Tailwheels (Pull Type) . . . . . Option           |
| Hitch . . . . . QA Cat. II or Clevis      | Driveline Size:                                     | Hydraulic Level Lift (Pull Type) . . . . . Standard    |
| Blade Carrier . . . . . Pan Stump Jumpers | Pull Type . . . . . Pull-Cat. 5 CV w/Slip Clutch    |  |
| Minimum PTO HP Required:                  | QA Lift Type . . . . . QA -Cat. 4 w/Clutch          |  |
| Lift . . . . . 45 hp                      |   |  |
| Pull. . . . . 50 hp                       |   |  |

Item numbers are base models only, pictures may show models with some options included. Please ask your sales representative for information on base models and models with options.

